

PROTECTED BY



ARMOUR-SHIELD™

SPECIFICATIONS

TUBE COMPOSITION - POSTS, RAILS & PICKETS

- ZAM™ Coated Cold Formed ERW Tubing**
- With a coating designation **ZM 275** being a minimum protective coating weight of 275gm/m² both interior and exterior
 - Top coat consisting of a chromium-free phosphate conversion coating
 - Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
 - ERW tube conforming to ASTM A787 Type 6
 - Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
 - Weld seams mill re-metalized

MATERIAL DIMENSIONS

PICKETS	5/8" × 5/8" (16mm × 16mm) 18 GA
RAILS	1-1/4" × 1-1/4" (32mm × 32mm) 16 GA
POSTS	2" × 2" (51mm × 51mm) 14 GA
OPTIONAL POSTS(1)	2" × 2" (51mm × 51mm) 11 GA
OPTIONAL POSTS(2)	2-1/2" × 2-1/2" (64mm × 64mm) 14 GA

WELDS	Stainless Steel Mig Weld
--------------	--------------------------

FITTINGS	14 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

FINISH	
GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	Gloss Black
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	36"	42"	48"	60"	72"
	914mm	1067mm	1219mm	1524mm	1892mm


STANDARD GATES	Passage, Double Entry, Canatilever
-----------------------	------------------------------------

OPTIONAL PICKET DESIGNS

STAMPED ARROW	CAST FINIAL
Arrow	Spiral Finial (SF)

OPTIONAL POST CAPS

Pyramid	Ball	Spiral

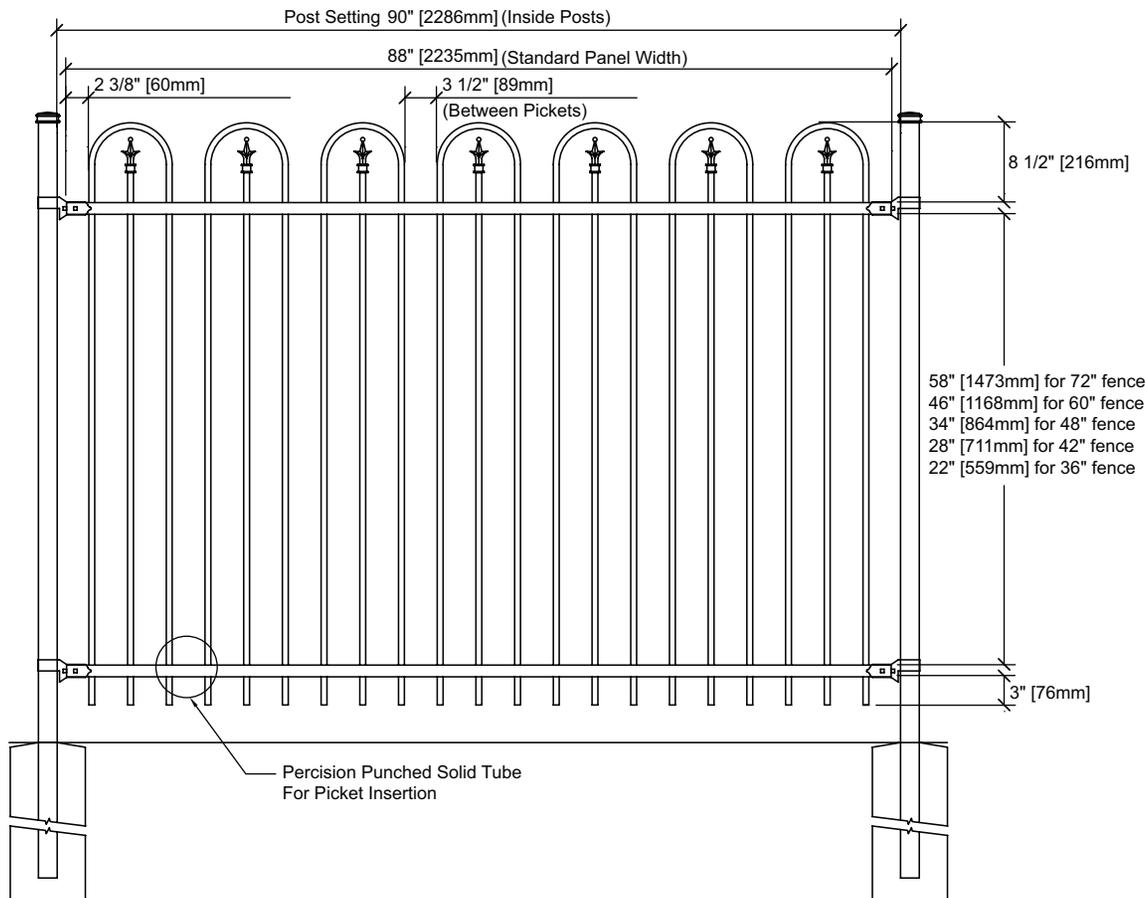

MEDALLION FENCE LTD
 10651 KEELE STREET
 MAPLE, ONTARIO L6A 3Y9
 (T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
 info@medallionfence.com || www.medallionfence.com

MATERIAL SPECIFICATIONS:
ARMOUR-SHIELD™ BY MEDALLION FENCE

STYLE:

CAMBRIDGE

SERIES:

4000

DATE: MM/DD/YYYY

1/15/2016