






OPTIONAL PICKET DESIGNS	
STAMPED ARROW	CAST FINIAL
	
Arrow	Spiral Finial (SF)

OPTIONAL POST CAPS		
		
Pyramid	Ball	Spiral

PROTECTED BY



ARMOUR-SHIELD™

## SPECIFICATIONS

### TUBE COMPOSITION - POSTS, RAILS & PICKETS

#### Coated Cold Formed ERW Tubing

- With a coating designation being a minimum protective coating weight of 275gm/m<sup>2</sup> both interior and exterior
- Top coat consisting of a chromium-free phosphate conversion coating
- Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- ERW tube conforming to ASTM A787 Type 6
- Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
- Weld seams mill re-metalized

### MATERIAL DIMENSIONS

PICKETS	5/8" × 5/8" (16mm × 16mm) 18 GA
RAILS	1-1/4" × 1-1/4" (32mm × 32mm) 16 GA
POSTS	2" × 2" (51mm × 51mm) 14 GA
OPTIONAL POSTS(1)	2" × 2" (51mm × 51mm) 11 GA
OPTIONAL POSTS(2)	2-1/2" × 2-1/2" (64mm × 64mm) 14 GA


WELDS	Stainless Steel Mig Weld
-------	--------------------------

FITTINGS	14 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	Gloss Black
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	36" 914mm	42" 1067mm	48" 1219mm	60" 1524mm	72" 1892mm
------------------	--------------	---------------	---------------	---------------	---------------

STANDARD GATES	Passage, Double Entry, Canatilever
----------------	------------------------------------

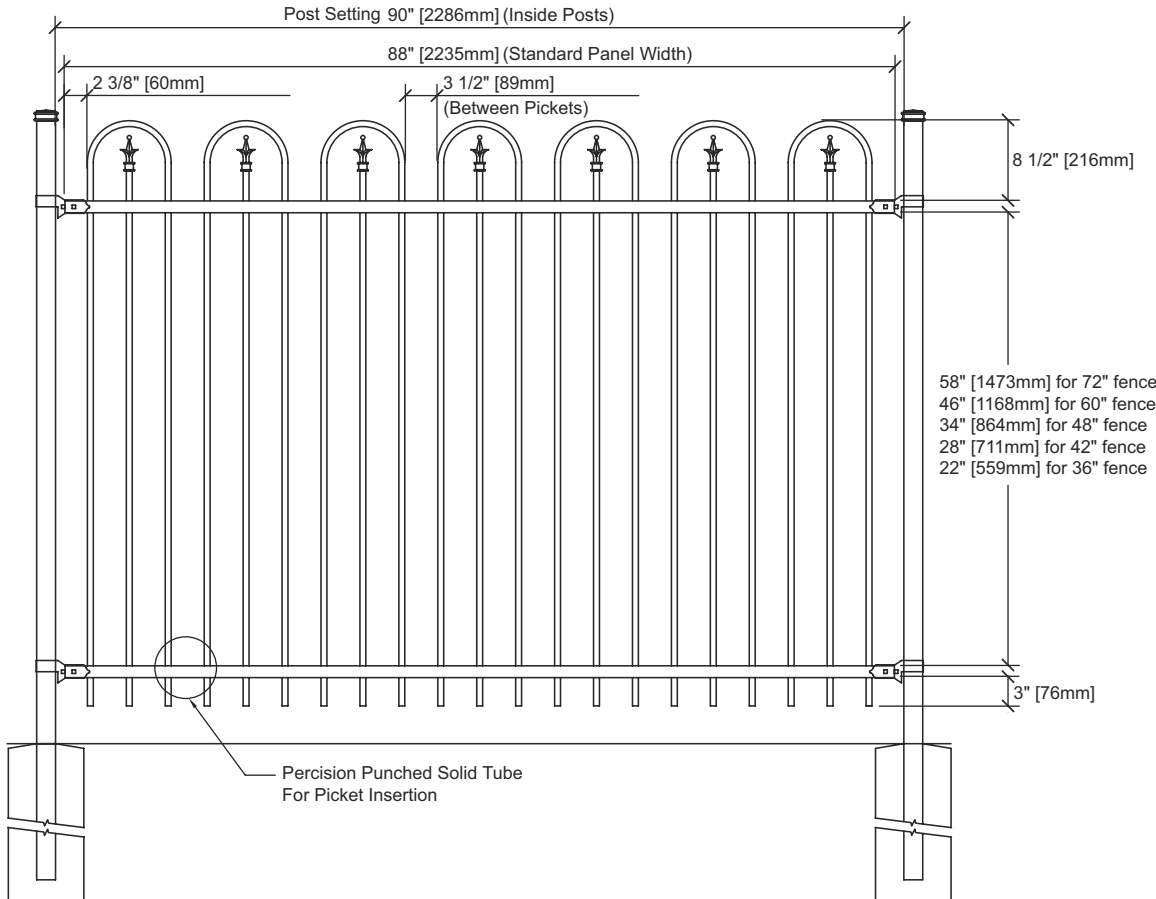

### MEDALLION FENCE

10651 KEELE STREET  
MAPLE, ONTARIO L6A 3Y9

(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564  
info@medallionfence.com || www.medallionfence.com

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™ BY MEDALLION FENCE

STYLE:

**CAMBRIDGE**

SERIES:

**FAIRMONT™**

DATE: MM/DD/YYYY

**5/16/2025**